



Hitzehandschuhe Qualatherm 450 (70G)

pure¹¹-Nr.: 05533, Hersteller: QRP GLOVES



Zusammenfassung

- Neue pure11-Artikelnummer (ab 01.07.2023): 1105533
- Art: Hitzeschutzhandschuhe
- Material: Nylon/Silikon
- Handspezifisch
- Nylongestrick mit Silikonbeschichtung
- Reduzierte Partikelabgabe
- Reinraumgeeignet
- Geeignet für Nass- und Trockenprozesse von -61,4°C bis 232°C
- Frei von PCB, Asbest und Glasfasern
- Silikon-Elastomer
- Gute Chemikalienbeständigkeit
- Gute Kälte- und Hitzebeständigkeit

Empfohlene Reinraumklassen

ISO	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
GMP	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Produktvarianten

pure¹¹-Nr.: 05533M

Farbe: Weiß / Größe: M / Herst.-Nr.: 70G / VE: 1 Paar

pure¹¹-Nr.: 05533L

Farbe: Weiß / Größe: L / Herst.-Nr.: 70G / VE: 1 Paar

pure¹¹-Nr.: 05533XL

Farbe: Weiß / Größe: XL / Herst.-Nr.: 70G / VE: 1 Paar

Quelle: <https://www.pure11.de/hitzehandschuhe-qualatherm-450-70g>



Qualatherm

THERMAL PROTECTION



Qualatherm 450

- PACKAGED FOR ISO 5 CLASS 100 CLEANROOM APPLICATIONS.
- TEMPERATURES FROM -78°F TO 450°F (-61.4°C TO 232°C).
- WET OR DRY ENVIRONMENTS.
- POLYTUFF SILICONE ELASTOMER FOR EXCELLENT RESISTANCE TO CHEMICALS, SOLDER AND FLUXES.
- NO PCB, ASBESTOS OR FIBERGLASS.



Ordering Information:

- 70G** – 12" Universal (Sizes: M, L or XL)
- 73G** – 10" Ambi Mitt Style (Ambidextrous, one size fits all)
- 75G** – 23" Shoulder Protection (Ambidextrous, one size fits all)
- Each Pair Individually Packaged
- 5 Pairs Per Shipping Case (75G 2 Pair Per Case)

Qualatherm 300

- PACKAGED FOR ISO 5 CLASS 100 CLEANROOM APPLICATIONS.
- LINT-FREE POLYESTER, LOOP-IN TERRY GIVES COMFORTABLE PROTECTION FOR HOT OR COLD HANDLING – UP TO 350°F.
- OVEREDGING COLOR CODING.
- FULLY LAUNDERABLE FOR REUSABILITY AND ECONOMY.


Ordering Information:

- T300** – (Sizes: S, M, L or XL)
- Each Pair Individually Packaged
- 12 Pairs Per Poly Bag – 5 Bags Per Shipping Case



Qualatherm 1400

- PACKAGED FOR ISO 5 CLASS 100 CLEANROOM APPLICATIONS.
- DRY CONTACT TEMPERATURES FROM -210°F TO 1400°F (-134°C TO 760°C) WITH NO CHARRING, ASH OR RESIDUE.
- STATIC DISSIPATIVE (10⁷ Ω PER SQUARE SURFACE UNIT), PER DOD-HDBK-263 AND MIL-B-81705.
- WILL NOT CONTAMINATE ANNEALING OVENS OR PROCESS EQUIPMENT.
- ELIMINATES HIGH-TEMP CONTAMINATION FROM BINDING AGENTS.
- NO PCB, ASBESTOS OR FIBERGLASS.
- COMPLETELY NYLON-LINED TO MINIMIZE PARTICULATE SHED DURING DONNING AND REMOVAL.

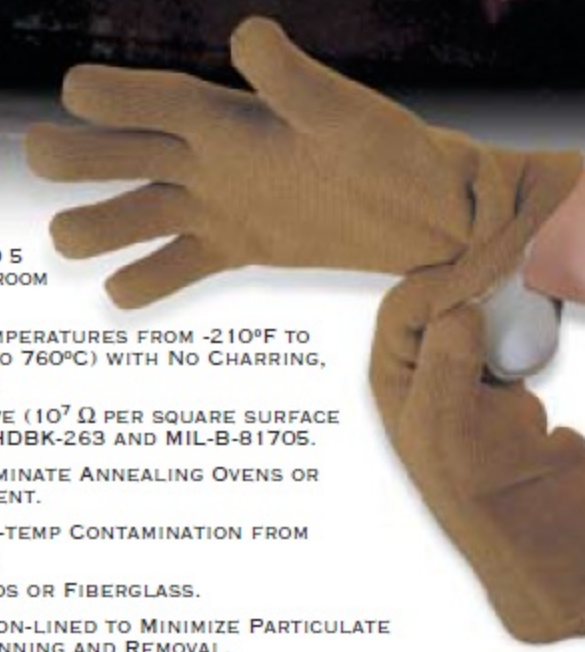

Ordering Information:

- 50G** – 14" Forearm Protection (Sizes: M, L)
- 55G** – 18" Elbow Protection (Ambidextrous, one size fits all)
- 57G** – 27" Shoulder Protection (Ambidextrous, one size fits all)
- Each Pair Individually Packaged
- 5 Pairs Per Shipping Case

Qualatherm 1000

- PACKAGED FOR ISO 5 CLASS 100 CLEANROOM APPLICATIONS.
- DRY CONTACT TEMPERATURES FROM -210°F TO 1000°F (-134°C TO 537°C) WITH NO CHARRING, ASH OR RESIDUE.
- STATIC DISSIPATIVE (10⁷ Ω PER SQUARE SURFACE UNIT), PER DOD-HDBK-263 AND MIL-B-81705.
- NO PCB, ASBESTOS OR FIBERGLASS.
- FULL NYLON LINING TO MINIMIZE PARTICULATE SHED DURING DONNING AND REMOVAL.



Ordering Information:

- 59G** – 14" Forearm Protection (Ambidextrous, one size fits all)
- Each Pair Individually Packaged
- 5 Pairs Per Shipping Case